

2496MHz~2690MHz 5G Circulator (PN: W23AB0215)

APPLICATION SUMMARY

This kind of 5G Circulator is widely applied in 5G base station.

TECHNICAL KEY FEATURES


- Small size
- High isolation
- Low Insertion Loss
- Customized Available



ELECTRICAL SPECIFICATIONS

No.	Parameter	Specifications
1	Frequency Range	2496MHz~2690MHz
2	Insertion Loss	$\leq 0.3\text{dB}$
3	Isolation	$\geq 22\text{dB}$
4	VSWR	≤ 1.17
5	Average Power	20W
6	Dimensions(mm)	$\phi 10*7$

MECHANICAL SPECIFICATIONS

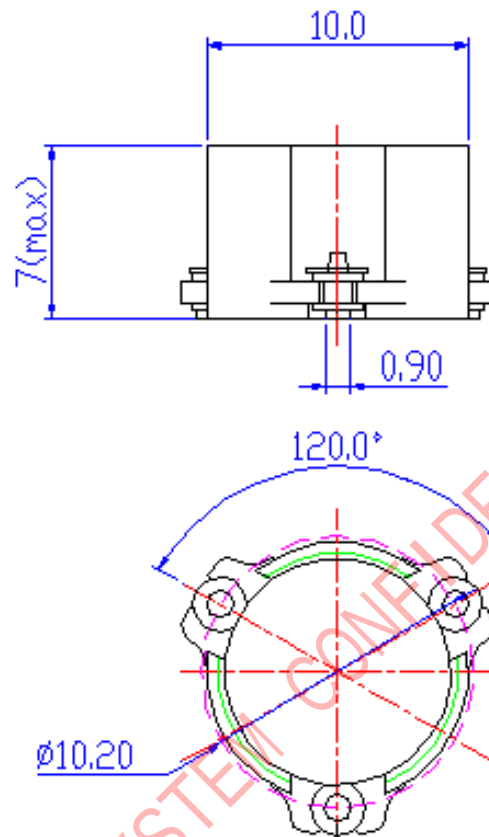

Unit: mm